




| Setting Out Table        |            |            |                              |
|--------------------------|------------|------------|------------------------------|
| Setting Out Point Number | Easting    | Northing   | Proposed Ground Level (mAOD) |
| 1                        | 254391.975 | 340196.033 | 4.459                        |
| 2                        | 254391.664 | 340140.034 | 4.459                        |
| 3                        | 254374.903 | 340140.127 | 4.599                        |
| 4                        | 254364.878 | 340140.183 | 4.732                        |
| 5                        | 254338.665 | 340140.329 | 4.721                        |
| 6                        | 254338.867 | 340176.675 | 4.837                        |
| 7                        | 254340.065 | 340177.548 | 4.800                        |
| 8                        | 254340.963 | 340194.010 | 4.919                        |
| 9                        | 254345.224 | 340196.293 | 4.743                        |
| 10                       | 254363.954 | 340196.189 | 4.594                        |
| 11                       | 254367.847 | 340195.376 | 4.660                        |
| 12                       | 254367.663 | 340192.865 | 4.662                        |
| 13                       | 254368.287 | 340182.620 | 4.656                        |
| 14                       | 254363.501 | 340165.191 | 4.691                        |
| 15                       | 254363.494 | 340164.191 | 4.697                        |
| 16                       | 254371.245 | 340154.344 | 4.630                        |
| 17                       | 254373.756 | 340143.219 | 4.608                        |
| 18                       | 254389.536 | 340171.047 | 4.478                        |
| 19                       | 254389.473 | 340165.017 | 4.479                        |

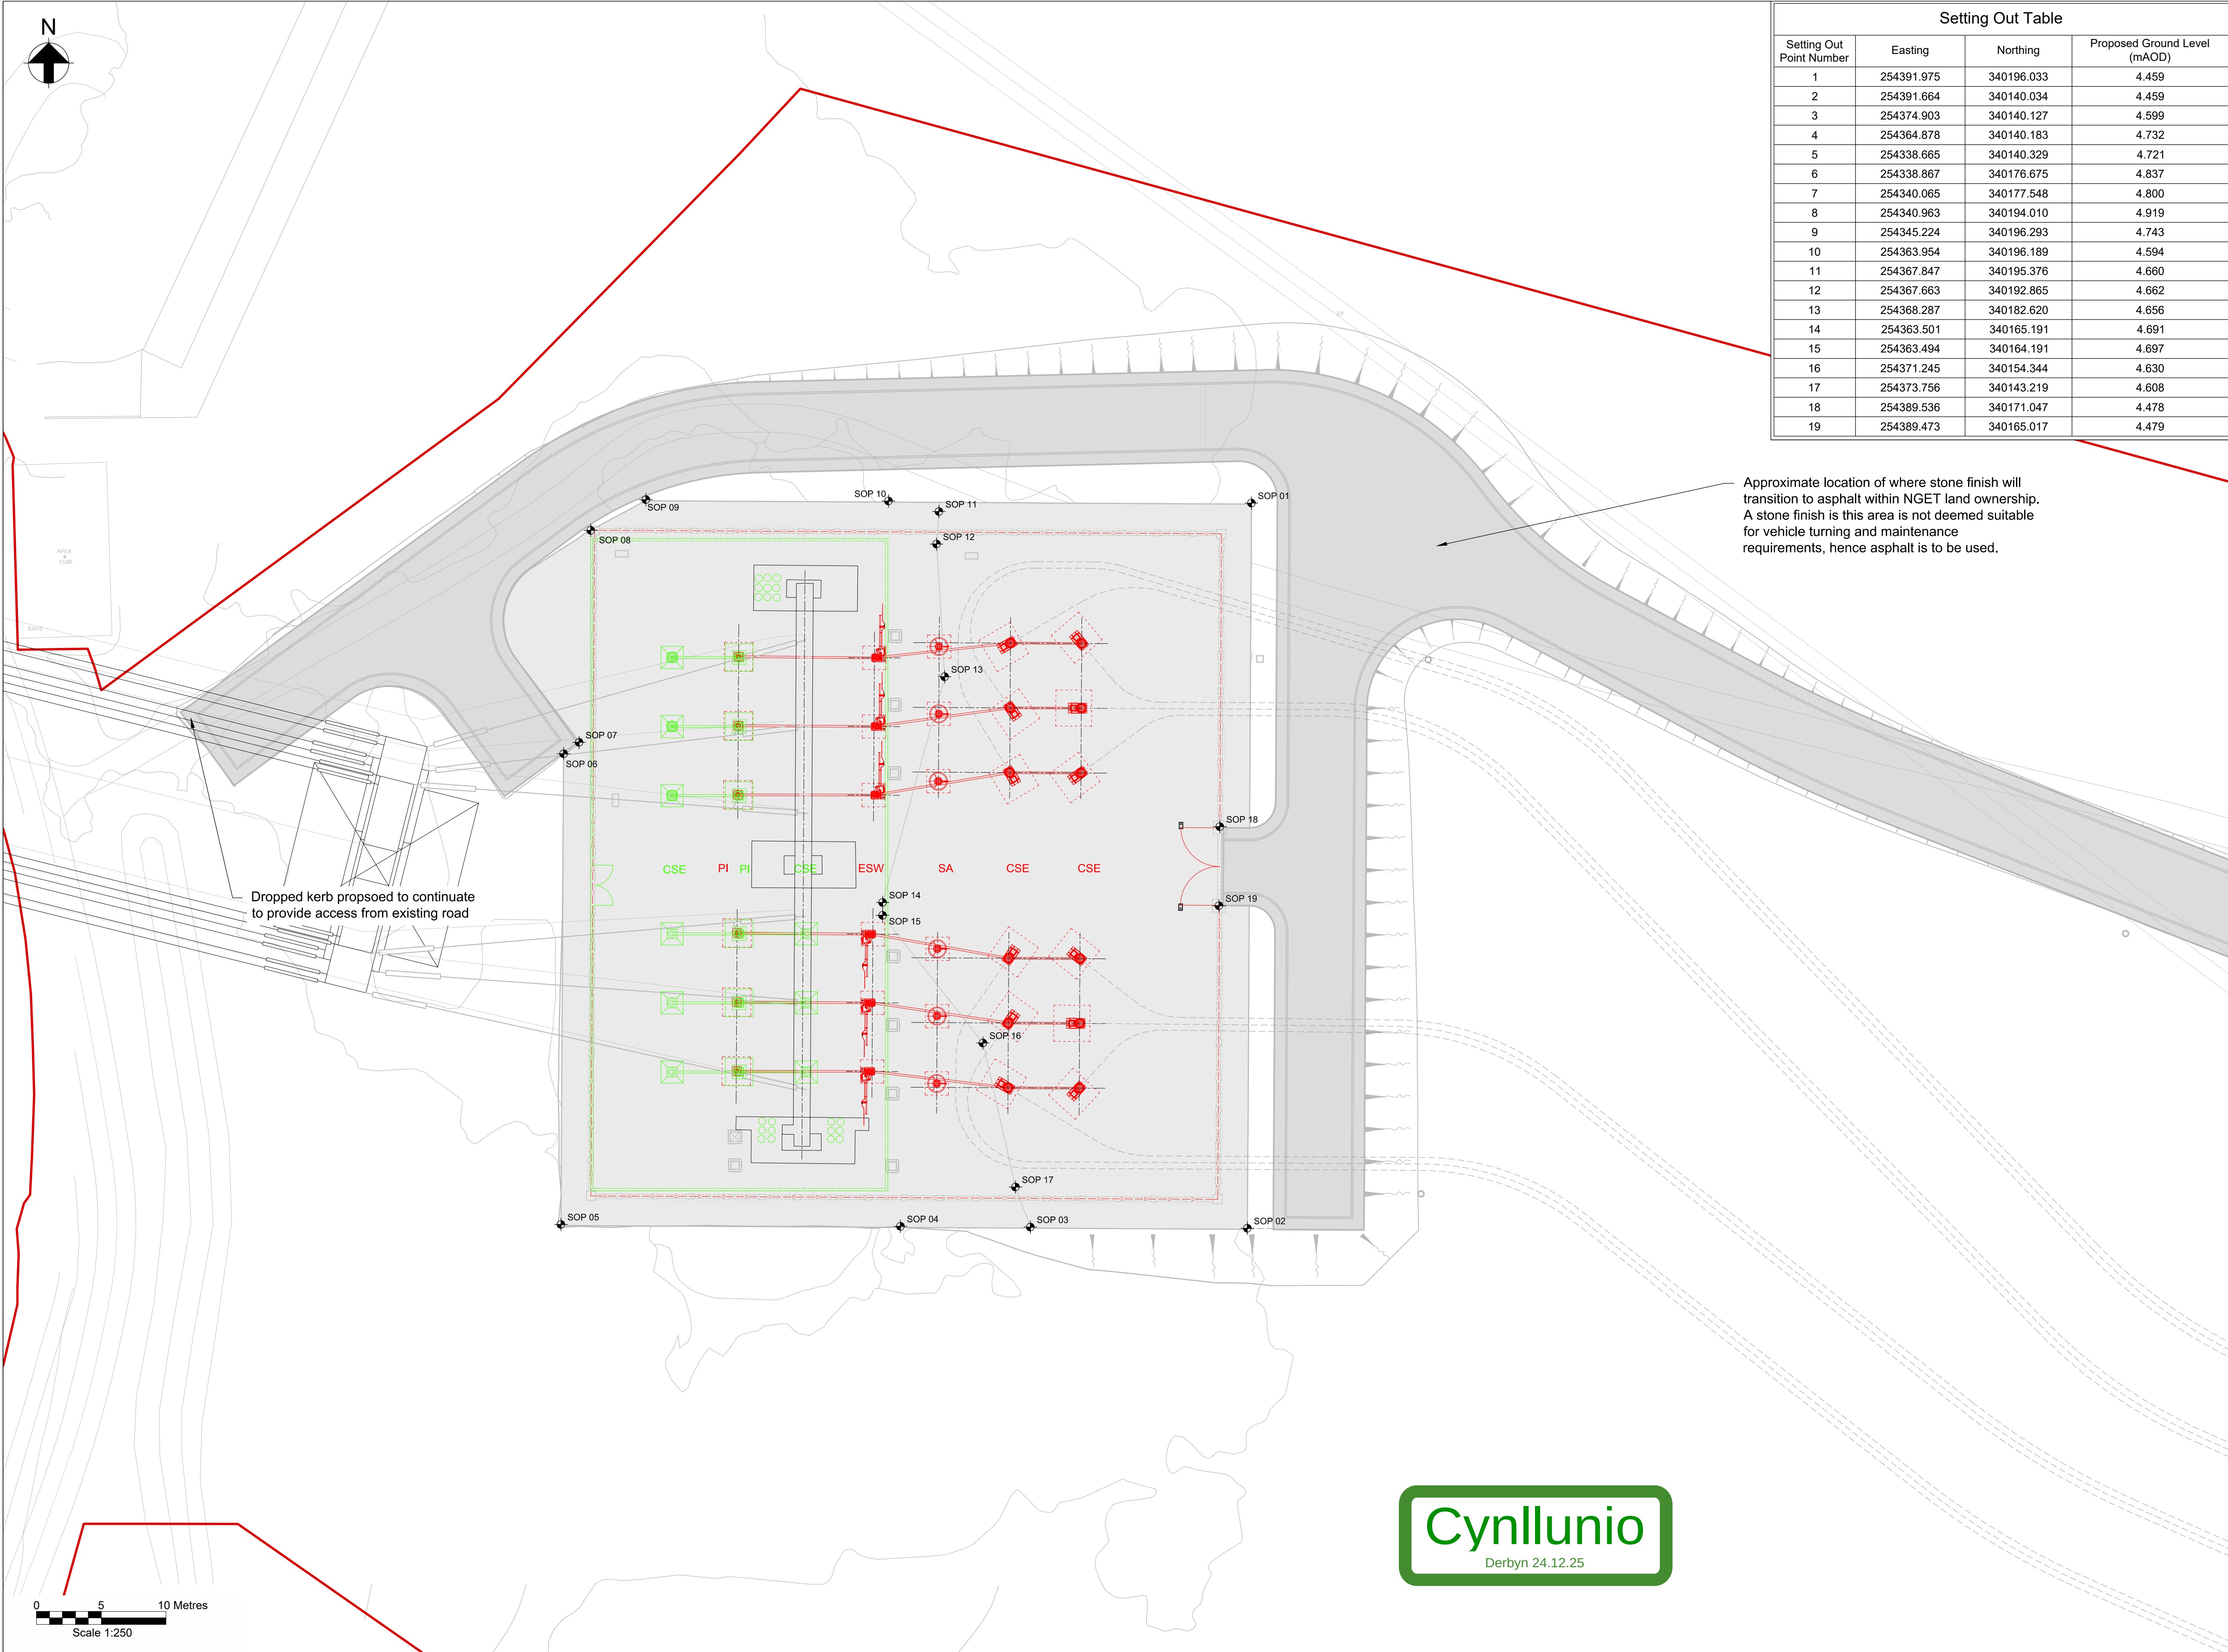

- Notes**
- Do not scale from this drawing.
  - Drawing to be printed in colour.
  - All dimensions in metres unless otherwise stated.
  - Over head line (OHL) tower and download arrangements are indicative. Detail of current OHL equipment to be confirmed.
  - CSE Compound main earthing (MES) and fence earthing will maintain a 2m distance in line with NGTS 3.01.02 Section 1.11.3.
  - Construction works on CSEC shall be undertaken while equipment is live, and phasing of the works should be considered in relation to planned outages. Minimum safety clearances must be maintained to ensure the removal of risks associated with existing live equipment.
  - OHL system replacement and connection works to Wern compound to be undertaken by other parties.
  - For detailed landscaping refer to AECOM Landscaping Plan.
  - All palisade fencing shall be in accordance with BS 1722-12:2016, type reference GP24. The overall height of the fence shall be 2.4m above base level (Category 3 fencing system in accordance with NG TS2.10.02).

**Cable Sealing End Compound Equipment Key**

- Red Line Boundary
- Existing Equipment to be retained
- New Equipment to be added
- Existing Equipment to be removed

**Legend**

- Proposed Low Voltage Pit
- Proposed Comms Pit
- Proposed underground cable route (Only shown for context)
- Access Road
- Wern CSE Compound (crushed rock surfacing)
- Proposed Ø450mm Inspection Chamber
- Proposed Gully with Grid Type Cover

